

MAIN FEATURES

Highest quality and reliability. ComAp IntelliLite AMF 25 controller. Ready to control MAINS – GENERATOR transfer switch. Configured for both manual and automatic mode (MRS + AMF). Wide range of remote communications options.	Wide range of standard and optional equipment. Engine heater – ready to load just after start. Drip tray, Anticorrosion coating: frame - Zr, canopy – Zr, Al-Zn. Brushless alternator.
---	--



Pictures for reference only

GENERAL DATA

Standby power E.S.P. [kVA] / [kW]	192,0 / 154,0
Prime power P.R.P. [kVA] / [kW]	175,0 / 140,0
Prime current P.R.P [A]	252,0
Frequency [Hz]	50
Voltage [V]	400
Exhaust emission	stage I
Fuel type	Diesel (EN 590)
Fuel consumption - 50% load [l/h]	18,6
- 75% load [l/h]	27,9
- 100% load [l/h]	36,6
- 110% load [l/h]	42,2
Engine control voltage [V]	12
Standard fuel tank capacity [l]	400
Autonomy with 100% load [h]	10,3
Design	S3350T400

Generator version	open	canopy
Model	FD 180 I-ST1	FD 180 I-ST
Weight without fuel [kg]	~1540	~2240
Dimensions L x W x H [mm]	2940 x 1110 x 1640	3350 x 1160 x 1930
Guaranteed noise power L _{wa} [dBA]	115,7 ± 2,5	97
Acoustic pressure L _{pa} 7m [dBA]	85,4 ± 2,5	67,9 ± 1

Prime Power PRP:

Prime power available in variable load application in accordance with ISO 8528, A 10% overload capacity is available for a period of 1 hour within a 12h period of operation. Average power consumption should not exceed 80% PRP for each 24h of operation.

Standby power ESP:

Emergency standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload allowed, limited to 200h of operation per year, max average power consumption 70% of ESP

Remarks:

All parameters are given for reference conditions: ambient air temperature up to 40 C and site altitude above sea level 1000m

Norms and directives:

- Machinery directive 2006/42/EC
- Low voltage directive 2014/35/EU
- EMC directive 2014/30/EU
- Noise directive 2000/14/EC
- Emission directive 97/68/EC
- ISO 8528-1/2018, ISO 8528-5/2018
- ISO 8528-13:2016
- IEC 60204-1

STANDARD CONTROLLER

Controller type: ComAp IntelliLite AMF 25

Easy to operate, intuitive graphical interface

Real time clock with battery supply

Stan-by and Prime power applications, AMF function available

Flexible event based history with up to 350 events

3 Phase generator current measurement

Generator and Mains phase voltage measurement

Active/reactive power measurement

Active and reactive energy counter

Running hours counter, multipurpose flexible timers

Battery charging alternator circuit connection

Comprehensive gen-set protections

Wide range of communication capabilities including :

- CAN and USB on board
- Internet access using Ethernet, GPRS or 4G module
- Support for Modbus and SNMP protocols

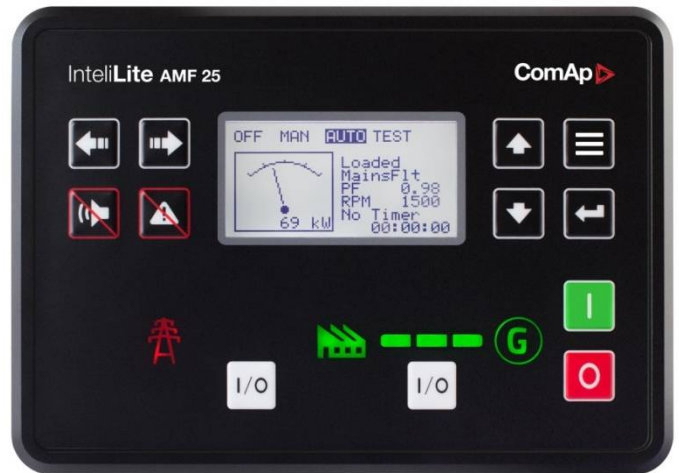
Cloud-based monitoring and control via WebSupervisor

Active SMS or e-mails (module required)

Geofencing and tracking via WebSupervisor

Operating temperature -20 + 70°C

IP65 operator interface protection


ENGINE

Brand	FPT (Iveco)
Type	NEF67TM4
Made in	Italy
Engine power [kW]	149,7
Emission standard*	stage I
Rotation per minute [rpm]	1500
Engine governor	mechanical
Governor class**	G2
Displacement [l]	6,7
No of cylinder	6
Fuel system	direct injection
Electrical system [V]	12
Cooling system capacity [l]	25,5
Oil pan capacity [l]	17,2
Fuel type	Diesel (EN 590)

ALTERNATOR

Nominal Voltage [V]	400
Nominal power factor (cos phi)	0,8
Ambient temperature, altitude	40 °C, 1000m n.p.m.
Nominal Power [kVA]	180,0
IP protection	IP 23
No of bearing	single bearing
Coupling	direct
Technology	brushless
Short circuit maintaining capacity	270% 10s
Efficiency [%]	93,4
Insulation class	H
Total harmonic content THD [%]	2,5
Reactance Xd'' [%]	12,8
Voltage regulator type	DVR, digital
Voltage measurement	3 phases
Voltage accuracy [%]	+/- 0,25
AVR supply system	auxiliary winding
AVR supply – optional	PMG
Made in	EU

* According directive 97/68/WE non road mobile machinery engine emission.

** According PN-ISO 8528-5/2018



FOCUSSED ON GENERATORS ONLY

Power Generator FD 180 I-ST

STANDARD EQUIPMENT

FPT (Iveco) NEF67TM4 engine	✓
Oil low pressure switch	✓
Engine high temperature switch	✓
Engine preheating with thermostat	✓
Engine oil Titan Cargo 15W40	✓
Fuel filter with water separator	✓
Coolant Fuchs Maintain Fricofin LL-50	✓
Coolant inlet outside of the canopy *	✓
Starting batteries 2x 100 Ah	✓
Battery charger	✓
GCB Schneider NSX 400 3P + Mic.2.3	✓
GCB shunt release coil	✓
Controller ComAp IL-AMF25	✓
Acoustic alarm	✓
Emergency stop button	✓
Silenced canopy made with Al.-Zn. *	✓
Standard color 7024	✓
Fuel tank integrated with a frame with drip tray	✓
Welded frame with fuel tank	✓
Fuel inlet inside, protected by canopy locked doors *	✓
Fuel level measurement	✓
Engine and alternator vibro isolators	✓
Exhaust compensator and silencer	✓
Transportation brackets	✓

OPTIONAL EQUIPMENT

Electronic engine speed governor	□
Oil pressure sensor	□
Engine temperature sensor	□
Oil draining hand pump	□
Battery disconnection switch	□
GCB 4P Schneider NSX Micrologic 2.3	□
Power Lock type power output *	□
Power sockets box *	□
Transfer switch controlled by generator controller	□
Transfer switch with ATS controller	□
GPRS communication card	□
Ethernet card	□
RS 485, RS 232 card	□
Remote display	□
Fuel inlet outside of the canopy with lock *	□
Drip space level sensor	□
Fuel and retention pump	□
Alternative fuel tank size 950l	□
External fuel tank 1 000 – 10 000 l	□
Fuel tank filling pump and shut-off valve	□

* Applies only for canopied version

INSTALLATION GUIDELINES

Power terminal	GCB terminal
Recommended cable for up to 30m power cable way	Flexible 5x120 mm ²
Recommended cable for do 30m generator heater supply	Flexible 3x2,5 mm ²

*For additional cable connection with FOGO ATS see ATS wiring diagram

Exhaust pipe min diameter (max. 7 m, 4 bends)	101,6 mm
Exhaust pipe min diameter (max. 15 m, 4 bends)	114,3 mm

MAINTENANCE GUIDELINES

Fuel filters replacement	500 h / 1 year
Oil replacement	After first 100h, then every 500 h / 1 year
Oil filters replacement	After first 100h, then every 500 h / 1 year
Coolant replacement	1000 h / 2 years
Battery replacement	2 years
Electrical installation supervising	According to local requirements, at least once per year

WARRANTY

Continuous operation generators	12 months up to 1000 working hours
---------------------------------	------------------------------------

Version: Aug-21

Datasheet could be changed without notification

www.fogo.pl

FOGO Sp. z o.o.
ul. Święciechowska 36, Wilkowice
64-115 Święciechowa

tel. +48 65 534 11 80
fax +48 65 534 11 81
agregaty@fogo.pl