


**MAIN FEATURES**

Highest quality and reliability. ComAp IntelliLite AMF 25 controller. Ready to control MAINS – GENERATOR transfer switch. Configured for both manual and automatic mode (MRS + AMF). Wide range of remote communications options.	Wide range of standard and optional equipment. Engine heater – ready to load just after start. Drip tray, Anticorrosion coating: frame - Zr, canopy – Zr, Al-Zn. Brushless alternator.
---	--

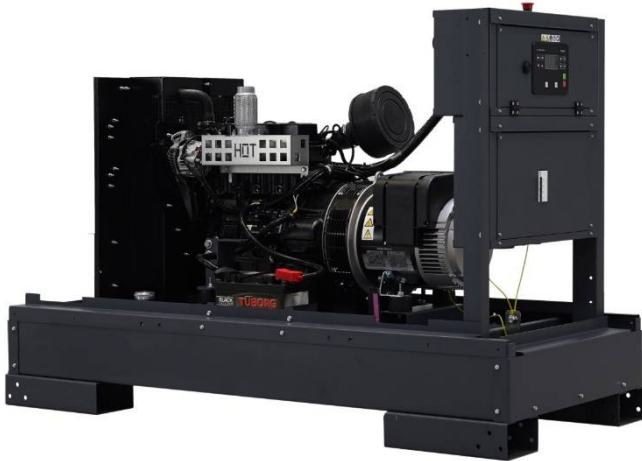

Sample photos, details of devices may slightly differ from the illustrations.

**GENERAL DATA**

Standby power ESP [kVA] / [kW]	16,4 / 13,1
Prime power PRP [kVA] / [kW]	15,0 / 12,0
Prime current PRP [A]	21,7
Frequency [Hz]	50
Voltage [V]	400
Exhaust emission	Stage V
Fuel type	Diesel (EN 590)
Fuel consumption - 50% load [l/h]	2,3
- 75% load [l/h]	3,3
- 100% load [l/h]	4,3
- 110% load [l/h]	4,8
Engine control voltage [V]	12
Standard fuel tank capacity [l]	140
Autonomy with 100% load [h]	30,6
Design	S1902T140

	Generator version	open	canopy
Model		FD 15 M5-ST1	FD 15 M5-ST
Weight without fuel [kg]		~500	650
Dimensions L x W x H [mm]		1900 x 850 x 1230	1900 x 850 x 1400
Guaranteed noise power L <sub>wa</sub> [dBA]			92 ± 1
Acoustic pressure @7m L <sub>pa</sub> [dBA]			64 ± 1

**Nominal power PRP:**

Prime power available in variable load application in accordance with ISO 8528, 10% overload capacity is available for a period of 1 hour within a 12-hour period of operation. Average power consumption should not exceed 70% PRP for each 24h of operation.

**Stand-by power ESP:**

Emergency standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload allowed, limited to 200 hours of operation per year, average power consumption should not exceed 70% ESP for each 24 of operation

**Remark:**

Ratings represent the genset performance capabilities to standard conditions specified in ISO 8528-1.

**Norms and directives:**

- Machinery directive 2006/42/EC
- Low voltage directive 2014/35/EU
- EMC directive 2014/30/EU
- Noise directive 2000/14/EC
- Emission directive 97/68/EC
- ISO 8528-1/2018, ISO 8528-5/2018
- ISO 8528-13:2016
- IEC 60204-1

**STANDARD CONTROLLER**

Controller type: ComAp IntelliLite AMF 25

Easy to operate, intuitive graphical interface

Real time clock with battery supply

Stan-by and Prime power applications, AMF function available

Flexible event based history with up to 350 events

3 Phase generator current measurement

Generator and Mains phase voltage measurement

Active/reactive power measurement

Active and reactive energy counter

Running hours counter, multipurpose flexible timers

Battery charging alternator circuit connection

Comprehensive gen-set protections

Wide range of communication capabilities including :

- CAN and USB on board
- Internet access using Ethernet, GPRS or 4G module
- Support for Modbus and SNMP protocols

Cloud-based monitoring and control via WebSupervisor

Active SMS or e-mails (module required)

Geofencing and tracking via WebSupervisor

Operating temperature -20 + 70°C

IP65 operator interface protection


**ENGINE**

Brand	Mitsubishi
Type	S4L2-Z562SD
Made in	Indie
Engine power [kW]	14,0
Emission standard*	Stage V
Rotation per minute [rpm]	1500
Engine governor	mechanical
Governor class**	G1
Displacement [l]	1,8
No of cylinder	4
Fuel system	
Electrical system [V]	12
Cooling system capacity [l]	2,5
Oil pan capacity [l]	6,0
Fuel type	Diesel (EN 590)

**ALTERNATOR**

Nominal Voltage [V]	400
Nominal power factor (cos phi)	0,8
Ambient temperature, altitude	40 °C, 1000m a.m.s.l
Nominal Power [kVA]	15,0
IP protection	IP 23
No of bearing	single bearing
Coupling	direct
Technology	brushless
Short circuit maintaining capacity	270% 10s
Efficiency [%]	85,3
Insulation class	H
Total harmonic content THD [%]	<3,5
Reactance Xd'' [%]	8,44
Voltage regulator type	DVR, digital
Voltage measurement	3 phase
Voltage accuracy [%]	+/- 0,5
AVR supply system	auxiliary winding
Made in	EU

\* According directive 97/68/WE non road mobile machinery engine emission.

\*\* According PN-ISO 8528-5/2018



# FOCUSSED ON GENERATORS ONLY

## Power Generator FD 15 M5-ST

### STANDARD EQUIPMENT

Mitsubishi S4L2-Z562SD engine	✓
Glow plugs	✓
Oil low pressure switch	✓
Engine high temperature switch	✓
Engine preheating with thermostat	✓
Engine oil Titan Cargo 15W40	✓
Coolant Fuchs Maintain Fricofin LL-50	✓
Coolant inlet outside of the canopy *	✓
Coolant draining valve	✓
Starting batteries 75 Ah	✓
Battery charger	✓
GCB Schneider Z25/4	✓
GCB shunt release coil	✓
Controller ComAp IL-AMF25	✓
Acoustic alarm	✓
Emergency stop button	✓
Silenced canopy made with Al.-Zn. *	✓
Standard color 7024	✓
Fuel tank integrated with a frame with drip tray	✓
Welded frame with fuel tank	✓
Fuel inlet inside, protected by canopy locked doors *	✓
Fuel level measurement	✓
Engine and alternator vibro isolators	✓
Exhaust compensator and silencer	✓
Transportation brackets	✓

### OPTIONAL EQUIPMENT

Oil pressure sensor	□
Engine temperature sensor	□
Oil draining hand pump	□
Battery disconnection switch	□
Power sockets box SOM 106 *	□
Transfer switch controlled by generator controller	□
Transfer switch with ATS controller	□
GPRS communication card	□
Ethernet card	□
RS 485, RS 232 card	□
Remote display	□
Fuel inlet outside of the canopy with lock *	□
Drip space level sensor	□
Double wall fuel tank 560 l	□
External fuel tank 1 000 – 10 000 l	□
Fuel tank filling pump and shut-off valve	□

\* Applies only for canopied version

### INSTALLATION GUIDELINES

Power terminal	GCB terminal
Recommended cable for up to 30m power cable way	Flexible 5x6 mm <sup>2</sup>
Recommended cable for do 30m generator heater supply	Flexible 3x2,5 mm <sup>2</sup>
*For additional cable connection with FOGO ATS see ATS wiring diagram	
Exhaust pipe min diameter (max. 7 m, 4 bends)	48,3 mm
Exhaust pipe min diameter (max. 15 m, 4 bends)	48,3 mm

### MAINTENANCE GUIDELINES

Fuel filters replacement	250 h / 1 year
Oil replacement	After first 50h, then every 250 h / 1 year
Oil filters replacement	After first 50h, then every 250 h / 1 year
Coolant replacement	1000 h / 2 years
Battery replacement	2 years
Electrical installation supervising	According to local requirements, at least once per year

### WARRANTY

Continuous operation generators	12 months up to 1000 working hours
---------------------------------	------------------------------------

Version: Dec-21

Datasheet could be changed without notification

[www.fogo.pl](http://www.fogo.pl)

FOGO Sp. z o.o.  
ul. Świąteczowska 36, Wilkowice  
64-115 Świąteczowa

tel. +48 65 534 11 80  
fax +48 65 534 11 81  
agregaty@fogo.pl