


MAIN FEATURES

Highest quality and reliability. ComAp IL-NT AMF25 controller.	Wide range of standard and optional equipment. Engine heater – ready to load just after start.
Ready to control MAINS – GENERATOR transfer switch. Configured for both manual and automatic mode (MRS + AMF).	Frame anticorrosion coating – Zr. Brushless alternator.
Wide range of remote communications options. Schneider NS type GCB.	

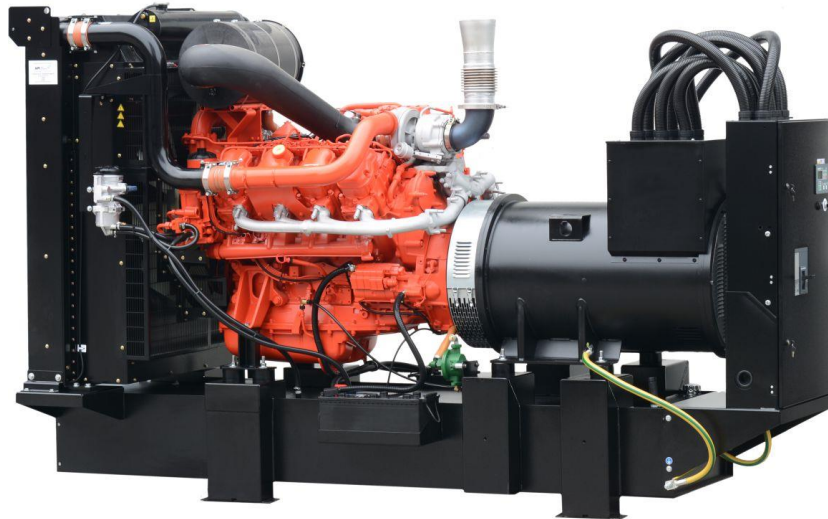

The presented image is for illustration purpose only.

GENERAL DATA

Code	F.0730.SA.F	Nominal power P.R.P.:	Prime power available in variable load application in accordance with ISO 8528, 10% overload capacity is available for a period of 1 hour within a 12-hour period of operation. Average power consumption should not exceed 70% PRP for each 24-hour period of operation.
Standby power E.S.P. [kVA] / [kW]	767,0 / 614,0	Stand-by power E.S.P.:	Emergency standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload allowed, limited to 200h of operation per year. Max mean load factor of 70% of rated power over 24-hour period of operation.
Prime power P.R.P. [kVA] / [kW]	697,0 / 558,0	Remark:	Ratings represent the genset performance capabilities to standard conditions specified in ISO 8528-1
Prime current P.R.P [A]	1006,0	Norms and directives:	<ul style="list-style-type: none"> • Machinery directive 2006/42/EC • Low voltage directive 2014/35/EC • EC directive 2014/30/EC • Emission directive 97/68/EC • ISO 8528-1:2005, ISO 8528-5:2013 • ISO 8528-13:2016 • EN 60204-1
Frequency [Hz]	50		
Voltage [V]	400		
Exhaust emission	fuel optimized		
Fuel type	Diesel (EN 590)		
Fuel consumption - 50% load [l/h]	76,1		
- 75% load [l/h]	111,3		
- 100% load [l/h]	141,2		
- 110% load [l/h]	158,8		
Standard fuel tank capacity [l]	740		
Autonomy with 100% load [h]	5,2		
Engine control voltage [V]	24		
Weight without fuel [kg]	~4260		
Dimensions L x W x H [mm]	3516 x 1466 x 2192		
Acoustic power Lwa [dBA]	127,3 ± 2		
Acoustic pressure Lpa (7m) [dBA]	97,9 ± 2		

STANDARD CONTROLLER

Controller type: AMF 25
Easy to operate, intuitive graphical interface
Real time clock with battery supply
AMF function available
Flexible event based history with up to 119 events
3 Phase generator current measurement
Generator and Mains phase voltage measurement
Active/reactive power measurement
Active and reactive energy counter
Running hours counter
Battery charging alternator circuit connection
Fuel level measurement
Generator protection (over/under frequency, voltage, overcurrent)
Communication with ECU supporting CAN J1939 standard
Communication interface RS 485 and RS 232 supporting Modbus RTU (IL-NT RS232-485 module required)
GSM modem / wireless internet (IL-NT GPRS module required)
Internet/Ethernet communication (IB-Lite module required)
InteliMonitor software for single gen-set view
WebSupervisor software for Android mobile devices or PC's for fleet management
Active SMS or e-mail (IL-NT GPRS or IB-Lite module required)


ENGINE

Brand	Scania
Type	DC16 078A 02-43
Made in	Sweden
Engine power [kW]	596,0
Emission standard*	fuel optimized
Rotation per minute [rpm]	1500
Engine governor	electronic
Governor class**	G3
Displacement [l]	16,4
No of cylinder	8
Fuel system	Extra high pressure XPI
Electrical system [V]	24
Cooling system capacity [l]	68,0
Oil pan capacity [l]	48,0
Fuel type	Diesel (EN 590)

ALTERNATOR

Nominal Voltage [V]	400
Nominal power factor (cos phi)	0,8
Ambient temperature, altitude	40 °C, 1000m a.m.s.l
Nominal Power [kVA]	730,0
IP protection	IP 23
No of bearing	single bearing
Coupling	direct
Technology	brushless
Short circuit maintaining capacity	270% 10s
Efficiency [%]	93,6
Insulation class	H
Total harmonic content THD [%]	3,5
Reactance Xd'' [%]	15,9
Voltage regulator type	DVR, digital
Voltage measurement	3 phases
Voltage accuracy [%]	+/- 0,25
AVR supply system	auxiliary winding
AVR supply optional	PMG
Made in	EU

* According directive 97/68/EC non road mobile machinery engine emission.

** According ISO 8528-5:2013



FOGO FOCUSED ON GENERATORS ONLY

Power Generator FDF 730 S

STANDARD EQUIPMENT

Scania DC16 078A 02-42 engine	✓
Electronic engine speed governor	✓
Oil low pressure switch	✓
Oil pressure sensor	✓
Engine high temperature switch	✓
Engine high temperature sensor	✓
Engine preheating with thermostat	✓
Engine oil Titan Cargo 15W40	✓
Fuel filter with water separator	✓
Coolant Fuchs Maintain Fricofin LL-35	✓
Starting batteries 2x180Ah	✓
Battery charger	✓
GCB Schneider NS1250 3P + Micrologic 2.0	✓
GCB shunt release coil	✓
Bar connection	✓
Controller ComAp IL-NT-AMF25	✓
Controller switch	✓
Acoustic alarm	✓
Emergency stop button	✓
Welded frame with fuel tank	✓
Fuel level measurement	✓
Exhaust compensator	✓
Engine and alternator vibro isolators	✓
Silencer delivered with the generator	✓
Transportation brackets	✓

OPTIONAL EQUIPMENT

Battery disconnection switch	✓
GCB 4P Schneider NS Micrologic 2.0	✓
Power Lock type power output	✓
Power socket box	✓
Transfer switch controlled by generator controller	✓
Transfer switch with ATS controller	✓
GPRS communication card	✓
Ethernet card	✓
RS 485, RS 232 card	✓
Remote display	✓
External fuel tank 1 000 – 10 000 l	✓
3-way valve for external fuel tank connection	✓
Fuel tank filling pump and shut-off valve	✓
Oil draining hand pump	✓



FOCUSED ON GENERATORS ONLY

Power Generator FDF 730 S

INSTALLATION GUIDELINES

Power terminal	Busbar
Recommended cable for up to 30m power cable way	Flexible 3x5x185 mm ²
Recommended cable for do 30m generator heater supply	Flexible 3x2,5 mm ²

*For additional cable connection with FOGO ATS see ATS wiring diagram

Exhaust pipe min diameter (max. 7 m, 4 bends)	133 mm
Exhaust pipe min diameter (max. 15 m, 4 bends)	

MAINTENANCE GUIDELINES

Fuel filters replacement	500 h / 1 year
Oil replacement	After first 100h, then every 500 h / 1 year
Oil filters replacement	After first 100h, then every 500 h / 1 year
Coolant replacement	1000 h / 2 years
Battery replacement	2 years
Electrical installation supervising	According to local requirements, at least once per year

WARRANTY

Continuous work generators	12 months up to 1000 working hours
----------------------------	------------------------------------

Wersja: 01.2019

Datasheet could be changed without notification

www.fogo.pl

FOGO Sp. z o.o.
ul. Świąteczowska 36, Wilkowice
64-115 Świąteczowa

tel. +48 65 534 11 80
fax +48 65 534 11 81
generators@fogo.pl